Planning, Development and Building Construction Division
Transportation and Infrastructure Renewal

Tel 902 368 5060
Fax1 902 368 5395
Fax2 902 569 0590
www.gov.pe.ca/

PO Box 2000
Charlottetown
Prince Edward Island
Canada C1A 7N8

Addendum

Flooring Replacement
Shaw Building
3750-15074

ADDENDUM # 02 **November 16, 2015** **Page 1 of 1**

The following amendment to the tender documents is effective immediately. This addendum shall form part of the contract documents.

Note: Please indicate this addendum number on the Contract Tender Form.

Item	Description

A2.1 **Reference Luxury Vinyl Tile Section 9LV .2 Material:**

.1 Remove:

.4 "New transition strips to be brass finish metal and to be fastened to the floor with screws. Metal edging to be installed where vinyl tile meets another type of flooring"

Replace with:

.4 Install new transition strips at all door openings.
Standard of Acceptance: Tandus/Centiva-Style: #ME001
Metaledge UN. Colour # 00176 Brass.

.2 Add:

.6 Install new quarter-round moulding on existing wood base to transition any gaps between base and new flooring. Patch and paint new trim and base to match existing.

A2.2 **Reference Carpet Tile Section 9M. 4. Installation:**

.1 Add:

9. Security Alarms: TIE to disconnect security alarms from desks in Rooms 500A, 508, 512, and 529. Contractor to co-ordinate schedule with TIE

representative to ensure that alarms have been properly disconnected prior to work commencing. In Room 508 where security wiring run under existing carpet (two locations), contractor to locate and protect wire before any removal work begins.

10. Room 529 Closet- existing rubber base to be replaced with new 6" rubber base.
    Standard of Acceptance : Johnsonite Grey

11. Existing wood base in Rooms 505, 506, 510, 512, 517 and 529: Remove existing secondary 1 ½" trim base before removing existing carpet. Replace with new trim to match existing; patch and paint to match existing.

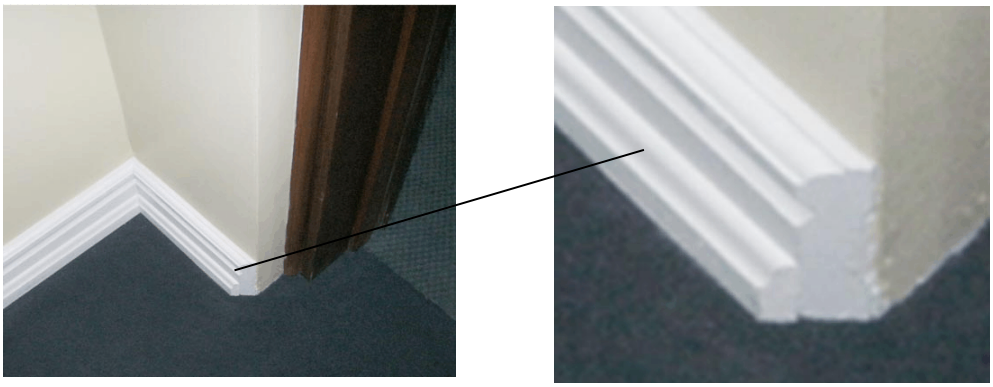

12. Corridor 502: Wall recess of 1/8" x 4" ht. to be filled before applying new base.

13. Installation of carpet to start mid-January.

- END OF ADDENDUM -